

# Lone Star

## MARINE


### DRUM WINCHES & ACCESSORIES

# DDW-250

## WIRING DIAGRAM

### Inclusions:

1 x Plug with 5m (16ft) lead | 4 x Lugs | 4 x Heatshrink  
1 x 50 Amp Circuit Breaker | 2 x Ferrite Rings | 1 x Cable Tie

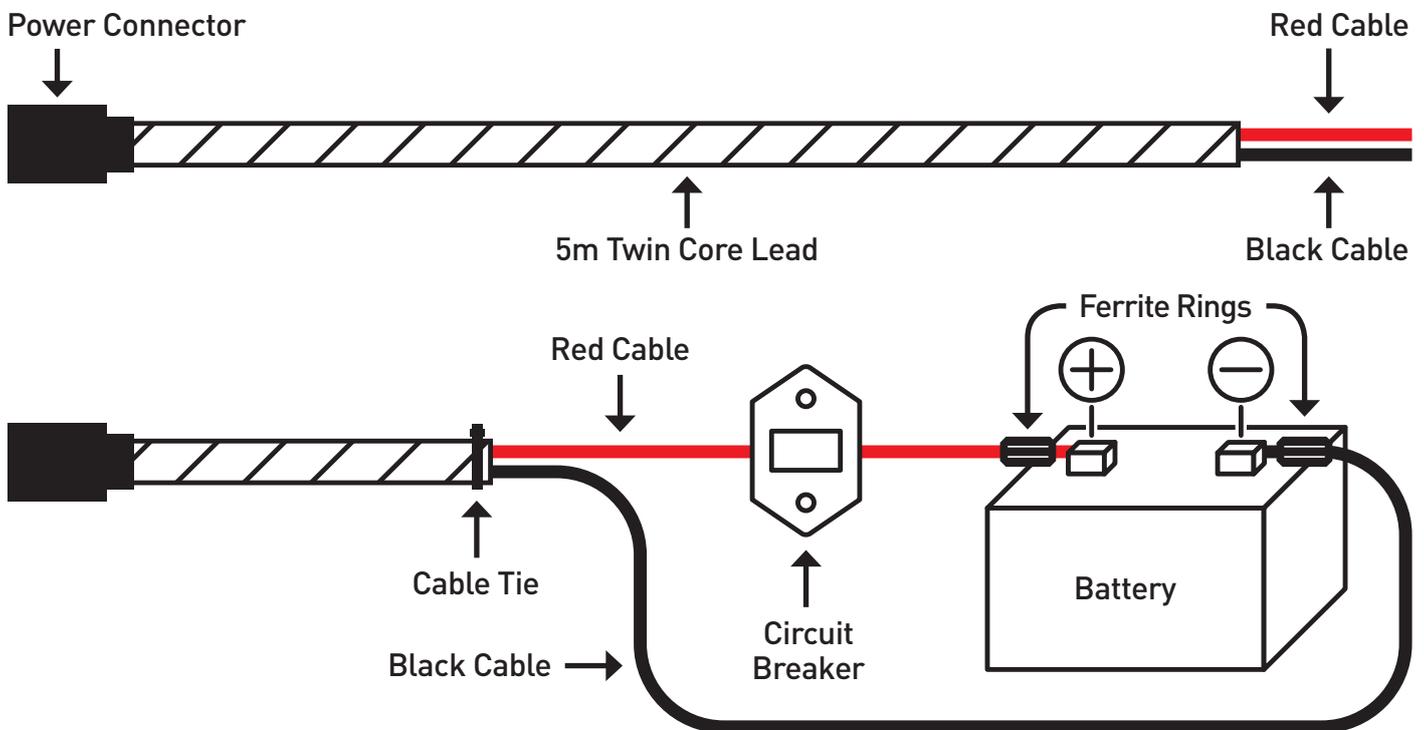

- ① Mount circuit breaker near battery
- ② Strip back outer sheath to expose individual cables
- ③ Positive (+) cable will be cut to add circuit breaker
- ④ Cut positive (+) cable and add lugs to each cable end (4)
- ⑤ Positive (+) (Red cable)
  - Battery to BAT post on the back of the circuit breaker
  - Plug to AUX post on the back of circuit breaker
- ⑥ Negative (-) (Black cable) directly to battery
- ⑦ Clip Ferrite Rings to cable near battery terminals
- ⑧ Add Cable Tie to base of twincore sheath