

A ROCK SOLID LEGACY.

# ROCNA<sup>®</sup>

## SWIVEL



### ROCNA: DESIGNED BY A SAILOR FOR FELLOW BOATIES

The Rocna range is designed by New Zealand sailor Peter Smith, who has been designing, building, and sailing boats since the early 1960's.

Peter's experience with the old anchoring problems led to the development of the world's best anchor: Rocna. Now, he's addressed a related challenge in the anchor system: swivel connectors.

Just like Rocna anchors, the new Rocna Swivel is designed for ultimate reliability and peace of mind. It's conceived from a philosophy of simplicity and made from quality materials to be strong and durable. It's the rock solid swivel.



ROCNA<sup>®</sup>  
ANCHORS // ROCK SOLID

G70 PROOF TESTED  
WLL: 3 460 kgf  
MBL: 13 800 kgf

251

Pictured swivel size: 12mm

**COMPACT & LOW PROFILE:** The minimalist design is unobtrusive and works smoothly with your bow-roller.


**ELIMINATES CHAIN TWIST**  
Helps your anchor to orient on the bow without resistance.

**NO WEAK LINK**  
Stronger than your chain (up to G70).

**UNRESTRICTED**  
Shackle\* to your anchor for free articulation and maximal retained strength of all components.

**SIMPLE, SECURE, RELIABLE ASSEMBLY**  
Peter's design eschews gimmicks, and favors ease-of-use and dependability.

**GUARANTEED FOR LIFE**  
Lifetime Warranty<sup>†</sup> against breakage, bending, and manufacturing defects.

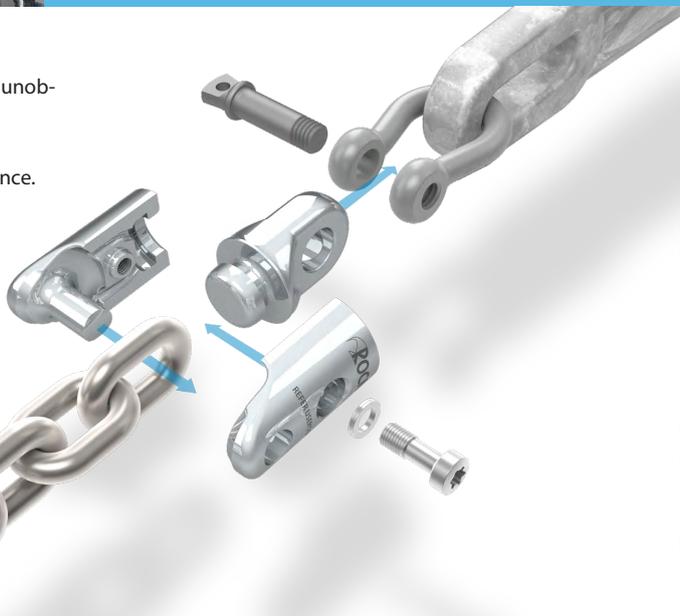

**HIGH TENSILE DUPLEX STAINLESS STEEL**  
Made from the best steel for submarine use.

**SUPERIOR MARINE CORROSION RESISTANCE**  
All Rocna Swivel components are suitable for even permanent use in seawater.

**INDIVIDUALLY PROOF TESTED**  
Your swivel has proven itself before it goes near your vessel.

**IN THE BOX**  
Included with the Rocna Swivel is an assembly tool, a spare lock-washer, and the User's Guide booklet.  
\* Shackle not included.

**SUITS ALL ANCHORS**  
The Rocna Swivel works with Rocna anchors – and all others.  
**WIDE RANGE OF CHAIN:**  
TBA

SWIVEL PIN SIZE	FOR CHAIN	WLL (WORKING LOAD LIMIT)	MBL (MINIMUM BREAKING LOAD)
TBA			
12 mm	10, 11 mm; 3/8"	3,460 kgf 7,640 lbf	13,800 kgf 30,500 lbf
TBA			
TBA			

**SPECIFY YOUR SET-UP**  
For detailed dimensions and compatibility guidance, refer to Rocna Swivel Specifications.  
**SECURE YOUR CONNECTION**  
The Rocna swivel is available from your Rocna supplier. Order now.

<sup>†</sup> Approved use only. Subject to exclusions. The Lifetime Warranty is in the User's Guide booklet and online at Rocna.com. The descriptions and guidelines shown in this literature should be used as a general reference only. Contents of this document are based on the latest information available at the time of publication. CMP / Rocna Anchors assumes no responsibility for the accuracy of the information contained herein. Product specifications are subject to change without notice. The names "Rocna" and "Vulcan" are registered trademarks and the Rocna, "Kiwi-R", and Vulcan logos, and other terms marked with "™" are trademarks of Rocna Anchors. All distributable media, including video, graphics, photography, and all copy printed or electronic are copyright © 2004-2025 Rocna Anchors. All rights reserved.