



a xylem brand

Technical Data Sheet

Quiet Flush QC Series

Model 38XXX-XXXX

This document provides technical information relating to this specific Jabsco model. General information, references and further resource locations are also included.

Jabsco Quiet Flush electric toilets are designed to meet the demands of modern boating expectations with reliable performance and the fastest service time in the market thanks to QFE2 quick release system.

Features

- Quiet Flush Cycle
- Powerful centrifugal discharge pump to break up and evacuate waste
- Electronic control panel featuring 'eco' water saver mode
- Quick release system offering quick and simple access to discharge pump for servicing
- On-board fresh water or sea/river/lake water rinse models
- Rotatable base and discharge pump to ensure pipework can be routed to rear
- Quick release discharge ports for simple installation (straight and 90° discharge available)
- Compact or regular bowl sizes
- Soft close seat & lid or Wooden standard close.
- Easy clean shroud hiding all fixings

Kit Contents

Base Toilet Model:	Quiet Flush E2
Rinse Method:	Solenoid Valve – On-board Fresh Water Diaphragm Rinse Pump – Sea, River, Lake Water
Bowl Size:	Compact/Regular
Seat & Lid:	Soft Close/Wooden
Panel Switch:	Electronic Touch Sensor
IOM:	Included (P/N XXXXXXXXX)
Carton Type:	Single Colour Aftermarket
Master Pack Qty:	1

Hydraulic Performance (nominal voltage)

(Discharge pump with water)

Open Flow Rate:	80 LPM (21 GPM)
Max Operating Pressure:	0.5 bar (7.25 psi)
Fluid Temperature Range:	1 - 65C (34 - 150F)
Run Dry Capable:	YES

Control Panel and Box Specifications:

Panel	Membrane touch pad 3m link cable with quick connect Clip on fascia panel
Panel Flush Modes	Eco, Normal, Empty
Water Usage	Eco - 1.0 L Normal - 2.0 L Empty 1.0L



General Specifications

Part Number:	38X45-XXXX
Aftermarket Replacement:	38X45-XXXX
Replaces:	37045-XXXX, 37245-XXXX
Application:	Electric Marine Toilet System
Design:	High capacity discharge pump driven by permanent magnet motor. Thermal Motor Protection (TCO) Quick connect discharge pump assembly Quick connect discharge port
Toilet bowl inlet:	19mm (3/4") Hose barb
Waste discharge:	25mm (1") Hose barb (straight or 90° port) Option for 38mm (1.5") with adaptor

Electrical Performance


Nominal Voltage:	12.0 VDC	24.0 VDC
Voltage Range:	9.6 - 14.4 VDC	19.2 - 28.8 VDC
Max Current Draw:	20 A	10A
Fuse Size:	25 A	13 A
Duty Cycle:	Intermittent	
Leads:	LENGTH: 6 ft - 14AWG (182cm)	
Wire Connection:	Stripped Wire	

Materials


Ceramic Bowl:	Glazed Vitreous China
Seat & Lid (Compact)	Wooden, basked enamel plastic coating
Seat & Lid (Regular):	Thermoset Urea
Base Assembly:	ABS

Control Box	Sealed Control Box For 12/24 VDC Power Reverse polarity protected Electronically Controlled Heavy duty mechanical relays
IP Rating	IP56 (Panel and Control Box)

Dimensional Drawings: inches (millimeters)

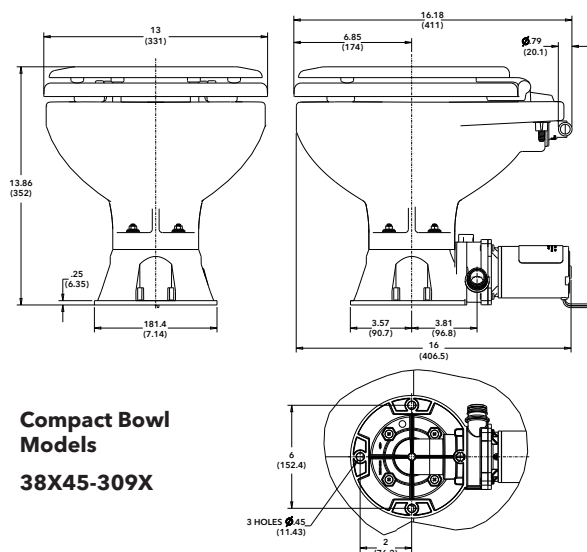

Compact Bowl Models
38X45-309X

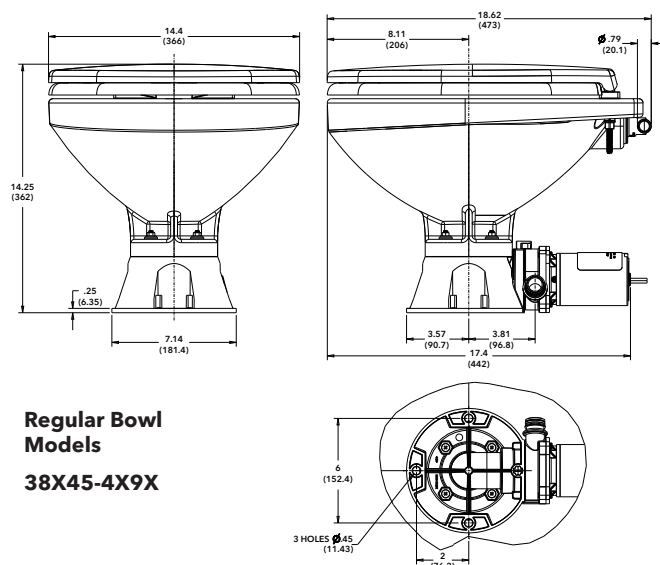

Regular Bowl Models
38X45-4X9X

Solenoid Valve

For use with existing on-board potable water system

Working Pressure:	0 - 10 bar (2.9 - 145 psi)
Fluid Temperature:	0 - 25C (0 - 77F)
Flow Direction:	Designated on product label
Electric Pilot Control:	Valve Normally Closed
Electrical Connections:	Spade terminal (non-polarity sensitive)
Hydraulic Connections:	15mm (3/4") John Guest, 15mm (3/4") Hose Barb, 19mm (3/4") Hose barb
Installation:	Valve can be mounted in any orientation
Minimum required inlet flow (on board fresh water pump)	11 LPM (3 GPM)

Diaphragm Rinse Pump

For use with sea/river/lake water rinse system

Nominal Voltage:	12VDC	24VDC
Voltage Range:	9.6 - 14.4 VDC	19.2 - 28.8 VDC
Max Current Draw:	4.5 A	4.5A
Open Flow Rate:	11 LPM (2.4GPM)	
Self Priming:	Yes - 1.8m (5.9ft) max	
Fluid Temperature Range:	5C - 60C (40F - 140F)	
Dry Run Capable:	YES	
Duty Cycle:	Intermittant	
Hydraulic Connections:	Inlet: 19mm (3/4") Hose barb Outlet: 19mm (3/4") Hose barb	
Inlet Strainer:	Inline, 40 mesh, snap in	

Compliance (Complete System)

CE:	YES
ABYC:	YES
UKCA:	YES
ROHS:	YES
ISO 8849 (Ignition Protection)	YES

Service Kits and Spares

Installation and Operation

IOM:

Warranty:

Customer Service:

Website:

See separate IOM

For guidance on proper installation and operation

of this product, as well as for any warnings or cautions involving use, please consult the appropriate IOM for the product. Printed IOM's are supplied with the product and are also available online.

On website, hard copies with products

Information included with IOM

Refer to contact info at bottom of page

www.xylem.com/Jabsco

Note: Specifications provided for guidance only. We reserve the right to change specifications without prior notice



a xylem brand

Xylem Inc. – USA
17942 Cowan
Irvine, CA 92614

Xylem Inc. – UK
Harlow Innovation Park,
London Road, Harlow, Essex, CM17 9LX

Xylem Inc. – CHINA
30/F Tower A, 100 Zunyi Road, Shanghai
200051

Xylem Inc. – HUNGARY KFT
2700 Cegléd
Külso-Kátaí út 41

Xylem Inc. – AUSTRALIA
2/2 Capicure Drive
Eastern Creek, NSW 2766

www.xylem.com/jabsco

© 2022 Xylem Inc. All rights reserved
Jabsco is a trademark of Xylem Inc. or one of its subsidiaries
43000-0620 Rev. A 03/2022