

Storm VR/VRC4000



Model	VR/VRC4000
VESSEL LENGTH	18–25m 58–82ft
POWER SUPPLY (DC)	24V AC Electric available
MOTOR (Watts)	2000
HYDRAULIC PRESSURE (bar/PSI)	200 2900PSI
HYDRAULIC FLOW	22L/min 5.8gal/min
MAX LOAD	1818kg 4000lb
WORK LOAD	450kg 992lb
AMPS WORK LOAD (DC)	110
MAX LINE SPEED	20m/min 66ft/min
CHAIN SIZE	8 mm (5/16") 10 mm (3/8") 13 mm (1/2") (chain only)
ROPE SIZE	14–16mm 9/16–5/8"
NET WEIGHT	DC VR 54kg VRC 58kg DC VR 119lb VRC 119lb HYD VR 50kg VRC 55kg HYD VR 110lb VRC 121lb
MANUAL OPERATION	MORS (opt)

Features

- Rope chain combination gypsy
- Quick release integrated swivel chain pipe cover
- Gypsy with capstan (VRC) or gypsy with low profile clutch top arrangement (VR)
- Heavy duty marine grade, dual direction motor in 12 & 24V DC, AC & Hydraulic
- Polished Stainless steel components
- Independent gypsy and tall capstan operation
- Capstan model features heavy duty fluted finish for increased grip
- Self aligning gearbox/adaptor
- Stainless steel shaft
- Cone clutch/brake
- Stainless steel mounting studs
- Shaft seal
- Lubricating grease nipple
- Clutch release handle
- Rope Chain Management System (RCMS)
- Installation/Operation booklet



Options

- Manual Override System (MORS)
- Round base VR/VRC model (chain only)
- AC electric motor available
- Mirror image models available
- Traditional polished bronze finish
- Extra deck clearance kit for any deck thickness
- Full range of accessories including chain, rope, chain stoppers, snubber kits & devil claws
- Electric & hydraulic operating options & accessories
- Auto anchor -chain counter.



Round base
Muir 4000

VR4000

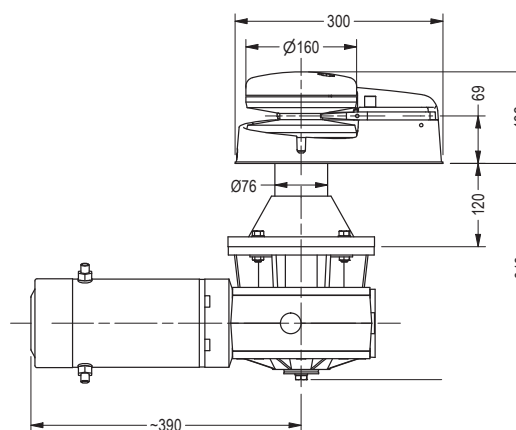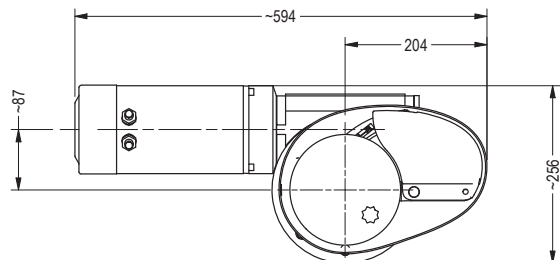

VRC4000

