


Features & Specifications:

- H9 65 Watt halogen bulb
- 370° motorized rotation
- 140° motorized tilt (45° down, 90° up)
- 8° beam angle
- Peak beam intensity: 225,000 candela
- Maximum beam distance: 949m / 3,113 ft.
- Current draw: 5.5 amps at 13.8v
- IP56 rated - protected against dust
- Fast/Slow speed options to improve positioning abilities
- High torque drive train with upgraded precise pan/tilt control
- Joystick operation - up/down, right/left
- Housing - ASA Luran heat resistant, high impact, weather resistant housing with highest quality UV resistant material
- Gears and transmission parts/engineering Lexan, and brass prevents rust, corrosion and oxidation that could impair performance
- All connectors are weatherproof and meet OEM vehicle manufacturer specifications
- Power connects via one 20-foot cord to existing vehicle/boat harness or 16 gauge wire to fuse box
- Dimensions: 185 x 185 x 165mm

GoLight Halogen Light Beam Dimensions

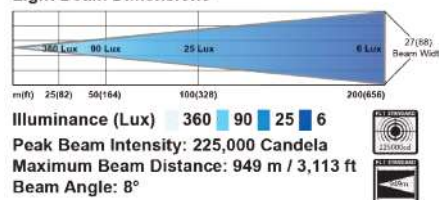

Code	Description
492671	GoLight GT Halogen Remote Control Spotlight






GOLIGHT GT LED REMOTE CONTROL SEARCHLIGHT

This permanently mounted motorized GoLight GT LED spotlight is designed for use in all weather conditions. Its operation is provided by a single hard wired dash mounted control allowing users to rotate the light 370° with a hard stop and to adjust the vertical tilt up to 135°. The 10 high-flux LEDs produce a working spot beam that spans up to 4,839 feet. As for its weatherproof value, the body of this model is constructed of the highest quality ASA Luran Thermoplastic offering you a heat resistant, dust resistant, UV resistant, and high impact resistant spotlight. All connectors are weatherproof as well and meet OEM vehicle manufacturer specifications. When it comes to getting the best in auxiliary lighting functionality, the GoLight is your "Go-to Light." This product is ideal for search and rescue missions, utility vehicles, house boats, RVs, and more.

Features & Specifications:

- Dashboard controls turns light on/off, so no additional switch required
- Permanent mount - stainless steel mounting bracket - 14 gauge
- Fast/Slow speed options to improve positioning abilities
- High torque drive train with upgraded precise pan/tilt control
- Joystick operation - up/down, right/left
- Advanced LED light source produces up to 544,000 Candela
- Max beam distance of 4,839 feet
- 10 x High-Flux LEDs with an 8 degree beam angle
- 370° motorized rotation
- 135° motorized tilt (45° down, 90° up)
- Current draw of 3.7 amps 13.8 volts
- Upgraded exterior housing - ASA Luran heat resistant, dust resistant, high impact, saltwater resistant, weather resistant housing with highest quality UV resistant material
- Gears and transmission parts/engineering Lexan, and brass prevents rust, corrosion and oxidation that could impair performance
- All connectors are weatherproof and meet OEM vehicle manufacturer specifications
- Power connects via one 15-foot cord to existing vehicle/boat harness or 16 gauge wire to fuse box
- Pedestal mount for better lighting angles on boats and vehicles
- Dimensions: 185 x 185 x 165mm

LED Light Beam Dimensions

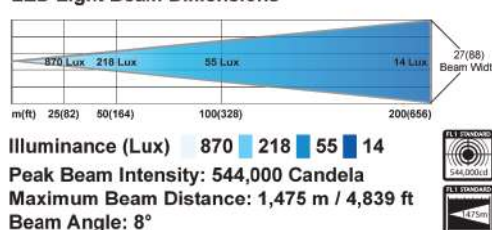

Code	Description	Colour	Voltage
492677	GoLight GT LED Remote Control Spotlight	White	12v
492679	GoLight GT LED Remote Control Spotlight	Black	12v
492683	GoLight GT LED Remote Control Spotlight	White	24v

GOLIGHT DASH CONTROL

Replacement Dash Mount control to suit the Remote control searchlights.



Code	Description
492685	Replacement Dash Mount Control to suit 492671 & 492677 (GT Series)
492686	Replacement Dash Mount Control to suit 492670 & 492676 (Old Model Pre 2020)



GOLIGHT REPLACEMENT GLOBES

Replacement globes to suit GOLIGHT Searchlights.

Code	Description
492687	Replacement Globe to suit 492670, 492671 & 492676
492688	Replacement Globe to suit 492672 & 492674