


Commander HYDRAULIC STEERING FOR OUTBOARD MOTORS




501Helm unit

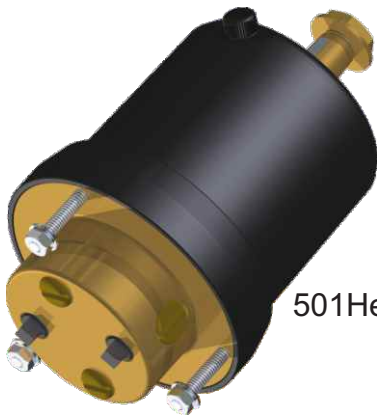

511BH cylinder


COMKIT-1

For pleasure use on Outboards up to single 200HP
or dual outboards Counter-rotating up to 400HP total**

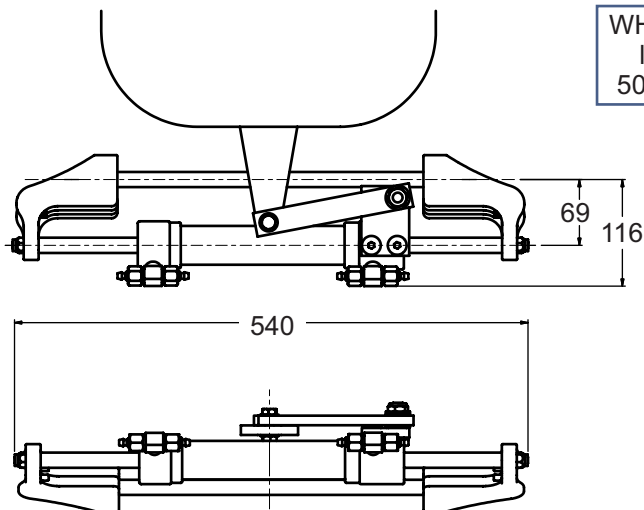

Model 511BH Cylinder dimensions

Capacity:- 154cc
Stroke:- 203mm
Weight:- 5Kg

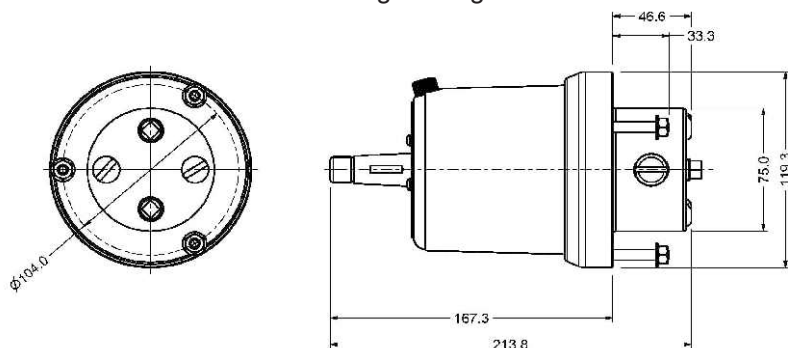

Model 501 Helm pump dimensions


Model 501 Capacity:-28cc/rev
In-built Lock valve
Maximum working pressure:- 800psi
Absolute maximum pressure:- 1000psi
Weight:- 5Kg

See also optional helm choices for rear-mount,
wedge and tilting helms for this kit

WHEEL TURNS
lock to lock
501 helm = 5.4

COMKIT-1

Complete Kit comprises:-
Model 501 Helm
Model 511BH cylinder
2 litres ULTRA-15 fluid
15Mtrs 3/8" OD Nylon tubing
Bleeding Kit
All fittings
Installation Manual
Packed weight 15Kg

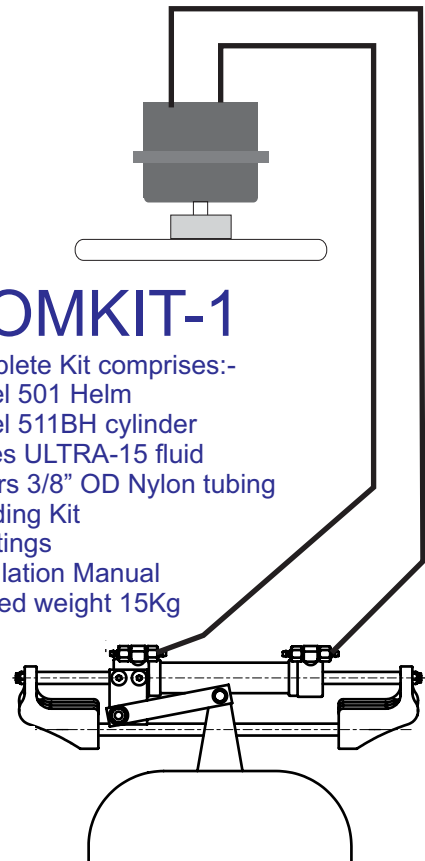

SIMPLE INSTALLATION TO ANY OUTBOARD**
See steering circuits for multiple outboards and
catamaran installation options.

****For some model Honda and other 4-strokes the
511BH-Honda version or 511BH-MERC is required
to avoid interference on motor cowling. Check selection
chart to confirm.**

HyDrive
HYDRAULIC STEERING